

Your contact data

Company + Address

Contact person

Telephone

Email


01. Application

- Protective bellow (dust or moisture protection)
- Compensator bellow
- Dosing bellow
- Valves and fittings
- Other applications:

02. Operating conditions

Steady-state temperature (°C):  
 Max. temperature (°C):  
 Internal pressure (bar):  
 External pressure (bar):  
 Frequency (strokes per min):

- Medium:
- inside
  - fluids
  - outside
  - with solids content
  - gases
  - incrusting

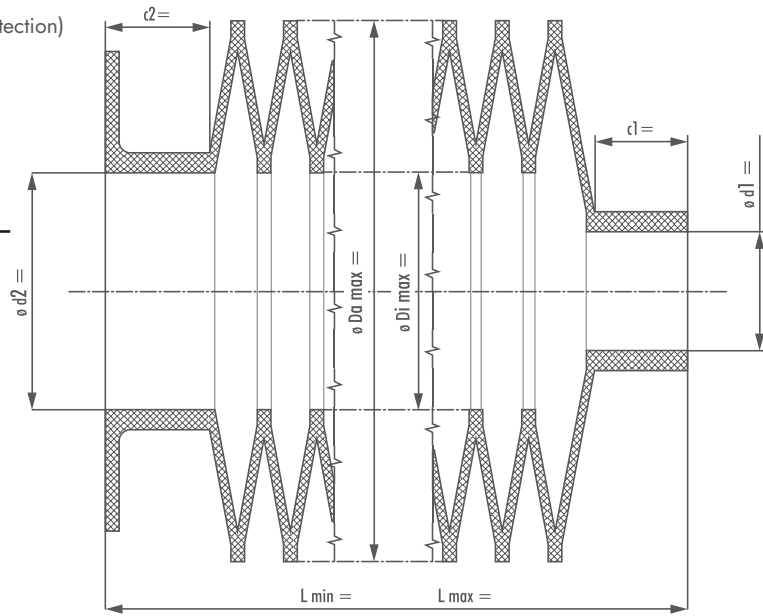

Please indicate the dimensions on the drawing if known.

03. Installation

- Horizontal
- Vertical
- Oblique

04. Connection type

- Flange 
- Cuff 
- Tri-clamp 
- Other

05. Stroke

Compressed length (mm):  $L_{min} =$   
 Installed length (mm):  $L_i =$

Expanded length (mm):  $L_{max} =$   
 Stroke =  $L_{max} - L_{min} =$

06. Folds

- Sharp folds 
- Round folds 
- Angular folds 

07. Material

- PTFE pure
- PTFE pure mod.
- PTFE conductive

08. Quantity

- Prototype:
- Spare part:
- Series: